



TRANE®

Chilled Water Fan Coil Unit

Maxxum™

Model: HCCA Size 10-24





The Best Choice for Comfort

The HCCA High Capacity Chilled Water Fan Coil Unit

Designed for applications that required 1000 CFM to 2400 CFM fan coil unit.

■ Features

- Flexible
With rear, bottom return plenum or without plenum
- High Capacity
Three, four or six rows of cooling coils with Trane designed Wavy 3B Aluminum Slit Fin
- Two or Four Pipe System
Cooling only or cooling/heating capability
- Rigid Casing
1.2 mm galvanized steel with 6 mm non-flammable PU insulation
- Independently levelable, one piece stamped drain pan
- Permanently lubricated motor bearings
- Balanced motor and fan
- Factory run tested
- Meet BS 476 fire code

■ Benefits

- Fits most chilled water applications
- Reduced height for normal and specialized installations
- One unit provides total comfort... Cooling and heating
- Prevents moisture on the casing
- Can be angled to accelerate condensate drainage
- Minimum maintenance
- Low vibration and noise
- Reliable Operation


■ HCCA Fan Coil Application Example

Such environment must be quiet and comfortable Trane have paid special attention to the noise in fan coil units, We use balanced motors, fan and permanently lubricated motor bearings to eliminate noise.

HCCA fan coil units are the best solution for separated and independent air conditioning system. They have been used successfully to avoid cross contamination from bacteria.



Hotels, Museums, Hospitals and Clinics

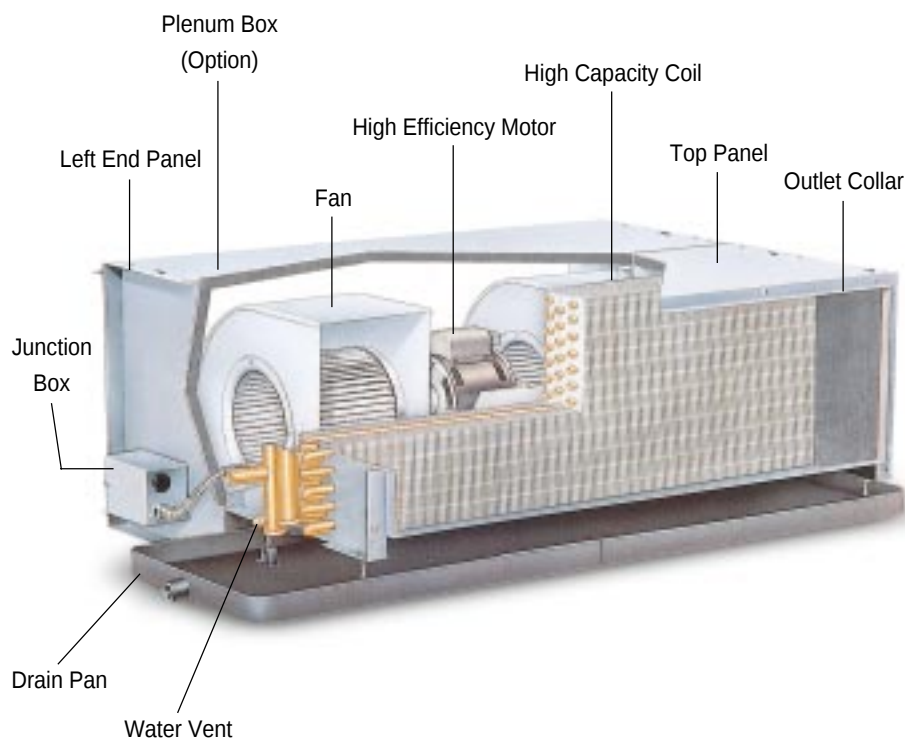

HCCA Model Designation

H	C	C	A	14	D	N	M	1	W	A	A	B
1	2	3	4	5,6	7	8	9	10	11	12	13	14

DIGIT 1

H = High

DIGIT 2

C = Capacity

DIGIT 3

C = Concealed

DIGIT 4

A = Development Sequence

DIGIT 5,6-SIZE/NOMINAL CFM (@100 Pa ESP)

10 = 1000 CFM
14 = 1400 CFM
18 = 1800 CFM
24 = 2400 CFM

DIGIT 7-COIL ROW, CONNECTION SIDE

C = 3 Row Cooling, Right Hand
D = 3 Row Cooling, Left Hand
E = 4 Row Cooling, Right Hand
F = 4 Row Cooling, Left Hand
J = 3 Row Cooling, 1 Row Heating, Right Hand
K = 3 Row Cooling, 1 Row Heating, Left Hand
L = 4 Row Cooling, 2 Row Heating, Right Hand
M = 4 Row Cooling, 2 Row Heating, Left Hand
N = 6 Row Cooling, Right Hand
P = 6 Row Cooling, Left Hand
S = Special

DIGIT 8-FUTURE USE

N = None

DIGIT 9-MOTOR TYPE

M = Normal Capacity with Temperature Cutout
S = Special

DIGIT 10-VOLTAGE/Hz/PHASE

1 = 220/50/1
2 = 220/60/1
S = Special

DIGIT 11-WATER CONNECTION

W = 2 Pipe System/Sweat Connection/Without Valve Package
A = 2 Pipe System/Thread Connection/Without Valve Package
B = 2 Pipe System/With Single 2 Way 2 Position Valve/Without Thermostat
C = 2 Pipe System/With Single 2 Way 2 Position Valve/With Cool Only Thermostat
D = 2 Pipe System/With Single 2 Way 2 Position Valve/With Cool/Heat Thermostat
H = 4 Pipe System/With 2 Sets 2 Way 2 Position Valve/Without Thermostat
I = 4 Pipe System/With 2 Sets 2 Way 2 Position Valve/With Cool/Heat Thermostat
J = 2 Pipe System(Cool Only)/With Single 2 Way 2 Position Valve/With Trane Wall Mounted Zone Sensor/TUC
L = 2 Pipe System(Cool Only)/With Single 2 Way Floating Valve/With Trane Wall Mounted Zone Sensor/TUC
R = 4 Pipe System/With 2 Sets 2 Way 2 Position Valve/With Trane Wall Mounted Zone Sensor/TUC
S = 4 Pipe System/With 2 Sets 2 Way Floating Valve/With Trane Wall Mounted Zone Sensor/TUC

DIGIT 12-DRAIN PAN

A = GI Std Drain Pan/5mm PE insulation
B = GI Long Drain Pan/5mm PE insulation
C = SUS Std Drain Pan/5mm PE insulation
D = SUS Long Drain Pan/5mm PE Insulation
E = GI Std Drain Pan/6mm PU (non-flammable) insulation
F = GI Long Drain Pan/6mm PU (non-flammable) insulation
G = SUS Std Drain Pan/6mm PU (non-flammable) insulation
H = SUS Long Drain Pan/6mm PU (non-flammable) insulation
S = Special

DIGIT 13-CONFIGURATION OPTIONS

N = Without Return Plenum/No Filter
A = With Rear Return Plenum/No Filter
D = With Rear Return Plenum/25mm Aluminum Filter
E = With Rear Return Plenum/25mm Foam Filter
F = With Bottom Return Plenum/No Filter
G = With Bottom Return Plenum/25mm Aluminum Filter
H = With Bottom Return Plenum/25mm Foam Filter

DIGIT 14-DESIGN SEQUENCE

B = second

Note:

1. HCCA only support thread connection package with valve.
2. The wiring from thermostat, zone sensor to motors, TUC and valves have to be done at job site; the wire for such installation is not included.



Performance Data

Cooling Capacity (kW)

220V/60Hz/1P, High Speed, Normal Motor, ESP 100Pa, EWT:7°C

UNIT SIZE	3ROW							4ROW							6ROW									
	AIRFLOW(CMH)	EAT(DB)	EAT(WB)	SH(KW)	TH(KW)	WTR	WFR	WPD	AIRFLOW(CMH)	EAT(DB)	EAT(WB)	SH(KW)	TH(KW)	WTR	WFR	WPD	AIRFLOW(CMH)	EAT(DB)	EAT(WB)	SH(KW)	TH(KW)	WTR	WFR	WPD
HCCA10	1928	24	17	6.37	7.08	5	0.388	14.24	1886	24	17	6.73	8.35	5	0.399	19.17	1801	24	17	6.88	9.41	5	0.450	34.51
		26	18.7	6.89	8.45	5	0.404	15.27		26	18.7	7.31	9.97	5	0.476	25.96		26	18.7	7.53	11.23	5	0.536	46.62
		28	22	6.97	12.41	5	0.593	29.81		28	22	7.65	14.63	5	0.699	25.96		28	22	7.89	15.81	5.7	0.663	67.55
		30	23.8	7.59	14.85	5	0.709	40.94		30	23.8	8.39	17.51	5	0.837	70.08		30	23.8	8.41	18.12	6.6	0.658	66.73
		32	25.5	8.19	17.23	5	0.823	53.50		32	25.5	8.88	19.67	5.6	0.833	69.54		32	25.5	8.91	20.35	7.4	0.661	67.11
HCCA14	2328	24	17	8.36	10.26	5	0.490	17.45	2294	24	17	9.05	12.24	5	0.585	30.24	2226	24	17	9.12	12.92	5	0.617	7.86
		26	18.7	9.09	12.25	5	0.585	23.76		26	18.7	9.9	14.60	5	0.698	41.14		26	18.7	10.01	15.41	5	0.736	10.82
		28	22	9.46	17.98	5	0.859	46.84		28	22	10.47	20.85	5.4	0.914	66.28		28	22	11.02	22.62	5	1.081	20.86
		30	23.8	10.39	21.52	5	1.028	64.70		30	23.8	11.21	24.03	6.2	0.921	67.14		30	23.8	12.25	27.07	5	1.294	28.15
		32	25.5	10.92	23.97	5.8	0.981	59.48		32	25.5	11.96	27.22	6.8	0.952	71.25		32	25.5	13.36	31.32	5.1	1.480	35.16
HCCA18	3211	24	17	11.65	14.45	5	0.690	34.52	3203	24	17	12.91	17.59	5	0.841	62.37	3186	24	17	13.90	20.05	5	0.958	19.32
		26	18.7	12.67	17.23	5	0.823	47.16		26	18.7	13.77	20.10	5.4	0.885	68.22		26	18.7	15.29	23.92	5	1.143	25.75
		28	22	12.77	23.94	6.0	0.957	61.76		28	22	14.05	27.49	7.0	0.942	76.34		28	22	17.04	35.12	5	1.678	48.43
		30	23.8	13.62	27.65	6.7	0.986	65.16		30	23.8	14.97	31.53	7.9	0.954	78.08		30	23.8	19.00	42.03	5	2.008	65.44
		32	25.5	14.46	31.22	7.4	1.012	68.35		32	25.5	16.44	37.15	7.8	1.133	106.29		32	25.5	20.35	47.57	5.5	2.074	69.14
HCCA24	4281	24	17	15.89	20.15	5.5	0.882	71.38	4230	24	17	16.89	22.99	5	1.098	22.10	4145	24	17	18.77	27.99	5	1.337	44.59
		26	18.7	16.92	23.04	6.1	0.900	73.96		26	18.7	18.47	27.42	5	1.310	30.11		26	18.7	20.71	33.39	5	1.596	60.98
		28	22	16.64	30.86	8.1	0.906	74.74		28	22	20.02	40.26	5	1.924	59.77		28	22	21.98	45.52	6.3	1.736	70.68
		30	23.8	17.63	35.29	9.0	0.937	79.40		30	23.8	21.67	46.93	5.5	2.051	67.11		30	23.8	23.69	52.45	7.1	1.763	72.67
		32	25.5	19.51	42.35	9.0	1.124	110.17		32	25.5	23.14	53.16	6.1	2.096	69.81		32	25.5	25.31	59.26	7.8	1.821	77.02

220V/50Hz/1P, High Speed, Normal Motor, ESP 100Pa, EWT:7°C

UNIT SIZE	3ROW							4ROW							6ROW									
	AIRFLOW(CMH)	EAT(DB)	EAT(WB)	SH(KW)	TH(KW)	WTR	WFR	WPD	AIRFLOW(CMH)	EAT(DB)	EAT(WB)	SH(KW)	TH(KW)	WTR	WFR	WPD	AIRFLOW(CMH)	EAT(DB)	EAT(WB)	SH(KW)	TH(KW)	WTR	WFR	WPD
HCCA10	1928	24	17	5.96	7.51	5	0.359	12.46	1886	24	17	6.30	8.75	5	0.418	20.76	1495	24	17	6.60	9.92	5	0.474	37.72
		26	18.7	6.48	8.97	5	0.428	16.87		26	18.7	6.90	10.44	5	0.499	28.17		26	18.7	7.28	11.84	5	0.566	51.24
		28	22	6.83	13.16	5	0.629	33.08		28	22	7.54	15.33	5	0.733	55.29		28	22	7.86	16.43	5	0.654	65.93
		30	23.8	7.50	15.75	5	0.753	45.59		30	23.8	8.36	18.35	5	0.877	76.22		30	23.8	8.46	18.88	6.8	0.660	67.05
		32	25.5	8.14	18.28	5	0.874	59.64		32	25.5	8.90	20.68	5.6	0.886	77.69		32	25.5	9.13	21.54	7.3	0.705	75.29
HCCA14	2328	24	17	8.91	11.17	5	0.534	20.26	2294	24	17	9.61	13.26	5	0.634	34.78	2294	24	17	9.65	13.98	5	0.668	9.10
		26	18.7	9.69	13.32	5	0.637	27.58		26	18.7	10.52	15.83	5	0.756	47.33		26	18.7	10.60	16.68	5	0.797	12.44
		28	22	10.18	19.56	5	0.953	54.53		28	22	10.80	21.51	6.3	0.815	54.06		28	22	11.81	24.49	5	1.170	23.81
		30	23.8	11.18	23.41	5	1.119	75.47		30	23.8	11.83	25.50	6.6	0.921	67.13		30	23.8	13.16	29.31	5	1.400	30.08
		32	25.5	11.86	26.38	5.6	1.131	76.94		32	25.5	12.73	29.20	7.0	0.990	76.38		32	25.5	14.44	34.01	5	1.625	41.11
HCCA18	3211	24	17	10.93	13.77	5	0.658	31.76	3203	24	17	12.10	16.69	5	0.797	56.72	2939	24	17	12.98	18.85	5	0.901	17.49
		26	18.7	11.90	16.43	5	0.785	43.36		26	18.7	13.25	19.91	5	0.951	77.60		26	18.7	14.28	22.49	5	1.075	23.31
		28	22	12.13	23.07	5.8	0.956	61.68		28	22	13.01	25.50	7.3	0.836	61.66		28	22	15.98	33.02	5	1.578	43.73
		30	23.8	13.10	27.04	6.2	1.036	71.26		30	23.8	14.06	29.79	8.0	0.893	69.37		30	23.8	17.84	39.52	5	1.888	58.99
		32	25.5	13.96	30.67	6.8	1.077	76.42		32	25.5	14.90	33.50	8.7	0.919	73.01		32	25.5	19.59	45.87	5	2.191	75.87
HCCA24	4281	24	17	15.61	18.84	6.2	0.728	50.80	4230	24	17	17.13	23.26	5	1.111	22.56	4188	24	17	18.67	27.89	5	1.332	44.30
		26	18.7	16.73	21.88	6.8	0.765	55.43		26	18.7	18.73	27.75	5	1.326	30.76		26	18.7	20.59	33.27	5	1.590	60.49
		28	22	16.59	30.20	8.5	0.845	66.06		28	22	20.28	40.74	5	1.947	61.07		28	22	21.50	44.51	6.6	1.619	62.43
		30	23.8	17.62	34.72	9.4	0.884	71.62		30	23.8	21.77	47.03	5.7	1.985	63.23		30	23.8	23.45	52.07	7.2	1.734	70.58
		32	25.5	18.68	39.20	10.5	0.892	72.78		32	25.5	23.56	54.17	5.9	2.190	75.62		32	25.5	25.05	58.77	7.9	1.784	74.20

Heating Capacity (kW)

UNIT SIZE	WFR (LPS)	EAT 21°C 220V/60Hz/1P						EAT 21°C 220V/50Hz/1P					
		1-ROW			2-ROW			1-ROW			2-ROW		
		45°C	55°C	65°C	45°C	55°C	65°C	45°C	55°C	65°C	45°C	55°C	65°C
HCCA10	0.2	4.26	6.04	7.89	6.23	8.86	11.50	4.41	6.25	8.16	6.44	9.16	11.89
HCCA10	0.3	4.45	6.36	8.20	6.36	9.09	11.73	4.61	6.58	8.49	6.58	9.40	12.13
HCCA14	0.2	5.31	7.53	9.83	7.76	11.05	14.33	5.55	7.88	10.28	8.12	11.55	14.99
HCCA14	0.3	5.55	7.93	10.23	7.93	11.33	14.62	5.80	8.29	10.69	8.30	11.85	15.29
HCCA18	0.2	6.45	9.14	11.93	9.41	13.40	17.38	6.28	8.91	11.63	9.19	13.07	16.96
HCCA18	0.3	6.73	9.62	12.41	9.62	13.74	17.72	6.57	9.38	12.10	9.39	13.41	17.30
HCCA24	0.2	7.57	10.73	14.01	11.06	15.74	20.42	7.61	10.79	14.09	11.12	15.53	20.54
HCCA24	0.3	7.91	11.30	14.58	11.30	16.14	20.82	7.95	11.36	14.65	11.37	16.24	20.95

SH : Sensible cooling capacity, kW
TH : Total cooling capacity, kW
ESP : External static pressure, Pa
CMH : Cubic meter per hour
LPS : Liter per second
EWT : Entering water temperature, °C
EAT : Entering air temperature, °C
WTR : Water temperature rise, °C
WPD : Water pressure drop, KPa
WFR : Water flow rate, LPS

Electrical Data & Sound Power Ratings

Coil Connection

Electrical Data

220V/60Hz/1P input Power (kW) at 100Pa ESP

HCCA UNIT		Fan Speed		
SIZE	ROW	High	Medium	Low
10	3	0.46	0.33	0.29
14	3	0.54	0.49	0.45
18	3	1.01	0.75	0.57
24	3	1.36	1.19	0.94
10	4	0.45	0.32	0.29
14	4	0.53	0.49	0.44
18	4	1.00	0.74	0.56
24	4	1.34	1.17	0.92
10	6	0.44	0.32	0.28
14	6	0.52	0.47	0.43
18	6	0.99	0.73	0.55
24	6	1.30	1.14	0.91

220V/50Hz/1P input Power (kW) at 100Pa ESP

HCCA UNIT		Fan Speed		
SIZE	ROW	High	Medium	Low
10	3	0.27	0.25	0.19
14	3	0.41	0.38	0.34
18	3	0.64	0.52	0.42
24	3	1.08	0.89	0.77
10	4	0.26	0.24	0.19
14	4	0.39	0.37	0.33
18	4	0.63	0.52	0.42
24	4	1.06	0.87	0.75
10	6	0.25	0.23	0.18
14	6	0.37	0.35	0.31
18	6	0.62	0.51	0.41
24	6	1.02	0.84	0.72

Sound Power Ratings


60Hz HCCA Sound Power Level (dB)

ITEM & SPEED		Octave Band Central Frequency (Hz)						
UNIT SIZE	Fan Speed	125	250	500	1000	2000	4000	8000
10	High	71	68	63	59	58	60	56
10	Medium	65	62	57	53	53	52	45
10	Low	63	59	56	52	52	49	44
14	High	71	69	63	58	58	59	56
14	Medium	68	66	59	55	56	56	50
14	Low	66	62	57	53	54	52	45
18	High	78	74	68	67	65	67	63
18	Medium	73	68	63	61	60	60	54
18	Low	68	63	58	56	55	53	46
24	High	84	82	75	72	70	71	70
24	Medium	81	79	72	68	67	69	65
24	Low	77	74	68	64	63	65	60


50Hz HCCA Sound Power Level (dB)

ITEM & SPEED		Octave Band Central Frequency (Hz)						
UNIT SIZE	Fan Speed	125	250	500	1000	2000	4000	8000
10	High	71	67	62	58	57	57	53
10	Medium	69	65	60	56	55	55	50
10	Low	64	59	55	51	51	48	42
14	High	73	72	65	61	60	61	59
14	Medium	71	68	63	59	58	59	56
14	Low	68	64	59	55	56	56	50
18	High	77	73	67	66	65	67	63
18	Medium	74	69	64	62	62	63	57
18	Low	72	65	60	58	59	57	51
24	High	84	83	76	72	71	72	71
24	Medium	82	80	73	70	68	70	67
24	Low	79	76	70	66	65	67	63

Notes:
 1. Data referenced to 10⁻¹² watts.
 2. Above performance determined with Normal static motor and operating against 0 Pa ESP (no ducting, ceiling material or other sound attenuating materials used).

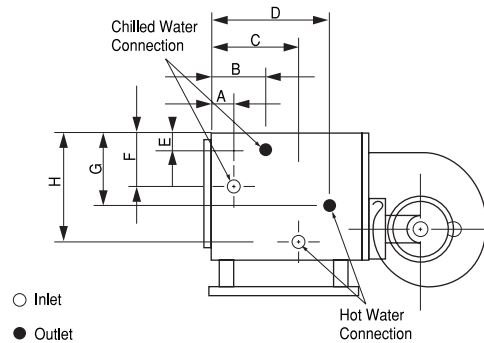

Cooling & Heating Coil Connection Dimension									
Unit		10		14		18		24	
Coil Type	Cooling Heating	3 Row 1 Row	4 Row 2 Row	3 Row 1 Row	4 Row 2 Row	3 Row 1 Row	4 Row 2 Row	3 Row 1 Row	4 Row 2 Row
		109	65	109	65	109	65	109	65
DIMENSION	A	109	65	109	65	109	65	109	65
	B	153	131	153	131	153	131	153	131
	C	182	165	182	165	182	165	182	165
	D	187	208	182	200	182	200	208	186
	E	100	88	152	139	152	139	152	172
	F	228	228	229	229	229	229	229	196
	G	60	154	66	165	66	165	174	117
	H	263	216	290	170	290	170	181	170
CONN. SIZE	Sweat (inch)	Cooling	7/8	7/8	7/8	7/8	7/8	7/8	1-1/8
		Heating	5/8	5/8	5/8	7/8	5/8	5/8	7/8
	Thread (FPT)	Cooling	3/4	3/4	3/4	3/4	3/4	3/4	1
		Heating							3/4

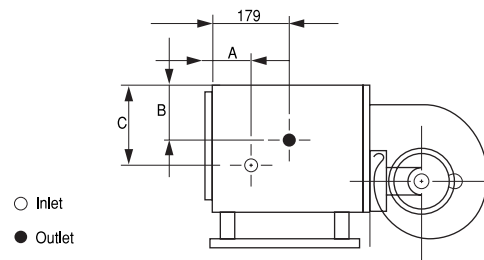

Cooling Coil Connection Dimension														
Unit		10			14			18			24			
Coil Type		3R	4R	6R	3R	4R	6R	3R	4R	6R	3R	4R	6R	
CONN. DIMENSION	SIZE	A	131	109	65	131	109	65	131	109	65	131	109	65
		B	88	88	88	137	137	172	137	137	172	137	172	172
		C	215	228	228	216	229	196	216	229	196	216	196	196
		Sweat (inch)	7/8	7/8	7/8	7/8	7/8	1-1/8	7/8	7/8	1-1/8	7/8	1-1/8	1-1/8
		Thread (FPT)	3/4	3/4	3/4	3/4	3/4	1	3/4	3/4	1	3/4	1	1

Note: Dimension in mm 25.4mm = 1 inch



Dimensions

UNIT SIZE	Case & Drain Pan Size				External Dimension															Without Plenum		
	A	B	C	D	E	F1	F2	G	H	I	J	K	L	M	N	O	P	Q	R			
HCCA-10	887	921	189	*1164	483	*748	*748	703	266	363	*409	*409	310	825	370	889	363	*706	687			
HCCA-14	963	997	157	*1208	483	*748	*748	703	316	*416	409	*409	310	901	370	965	*416	*706	687			
HCCA-18	1090	1124	171	*1349	449	*799	*799	754	316	416	*448	*448	361	1028	412	1092	416	*758	739			
HCCA-24	1623	1657	163	*1874	449	*799	*799	754	316	416	*448	*448	361	1561	412	1625	416	*758	739			

NOTES:

1. Dimension is mm.
2. Right hand coil connection shown.
3. External wiring, controls not supplied by Trane.
4. See coil connections size and location.

*Represent outline dimension of unit

Figure 1 : HCCA Unit Without Plenum


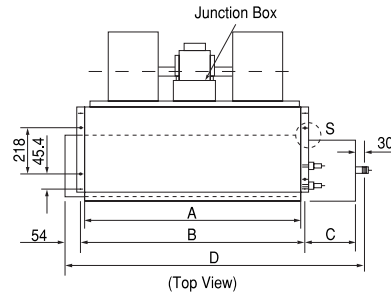


Figure 2 : HCCA Unit With Rear Return Plenum


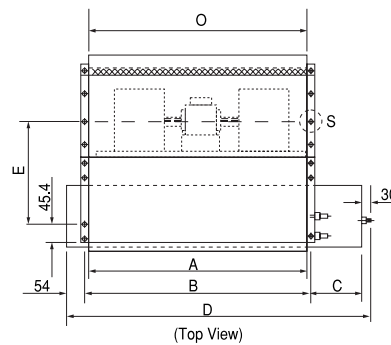


Figure 1 : HCCA Unit With Bottom Return Plenum









Figure 4 : S & T Drain Pan, For (Fig 1, 2, 3)

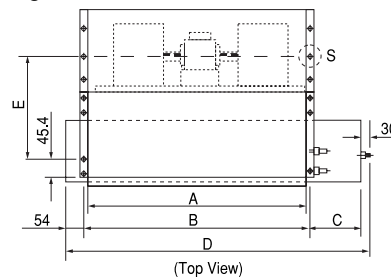

Wiring Diagram & Weight

Wiring Diagram

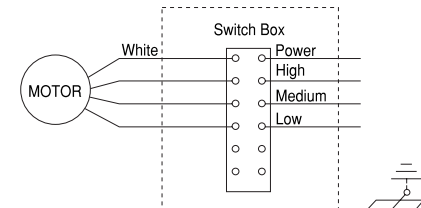

Factory Std. Wiring of HCCA-Standard Motor							
Unit Size	10	14	18	24			
Power Supply (Volt/Hz)	220/50	220/60	220/50	220/60	220/50	220/60	220/60
Wire Color	High Yellow	Black	Yellow	Black	Black	Black	Black
	Medium Blue	Yellow	Blue	Yellow	Yellow	Yellow	Yellow
	Low Orange	Blue	Orange	Blue	Blue	Blue	Blue

Weight

HCCA Unit Operating Weights

HCCA Unit without Plenum Operating Weights (kg)				
Row/Size	10	14	18	24
3ROW	50	54	71	81
4ROW	54	59	76	90
6ROW	62	70	88	105

HCCA Unit with Plenum Operating Weights (kg)				
Row/Size	10	14	18	24
3ROW	64	69	90	106
4ROW	68	74	95	115
6ROW	76	85	107	132

HCCA Unit Net Weights

HCCA Unit without Plenum Net Weights (kg)				
Row/Size	10	14	18	24
3ROW	47	50	66	75
4ROW	50	54	70	82
6ROW	56	62	79	93

HCCA Unit with Plenum Net Weights (kg)				
Row/Size	10	14	18	24
3ROW	61	65	85	100
4ROW	64	69	89	107
6ROW	70	77	98	120

Mechanical Specifications

*The Trane Fan Coil...
...Invented by Trane
...Perfected by Trane*

BASIC UNIT

The Trane Model HCCA fan Coil units consist of a rigid galvanized steel casing, copper tube/aluminum fin coil type heat exchanger, fan board assembly with motor and direct mounted forward curved centrifugal fans, manual coil air vent with drain pan, junction box with terminal strip, optional return air plenum and filter.

Unit casing manufactured in 1.2 mm thick galvanized steel with insulation of 9 mm thickness, 108 kg/m³ high density non-flammable PU foam.

Three options are available for the blow through unit-without return air plenum, with bottom return air plenum and with rear return air plenum.

FAN BOARD

All motors, with internal thermal temperature cutout above 140°C, are permanent split-capacitor, three speed, tap wound, induction type for maximum efficiency. Motors have permanently lubricated sealed sleeve bearings and all-direction, vibration isolating mountings to ensure vibration free operation and minimum noise. Motor wiring is connected to the junction box in flexible metal conduit. All motors are factoryrun tested and tested in the completed unit prior to shipment.

All unit sizes have double motor shaft extensions. Fan wheels, mounted directly on the motor extension shaft, are the centrifugal, forward curved, multi-blade, double-width, double-inlet type made of galvanized steel. Fan housings are made of galvanized sheet steel. For ease of servicing, the fan board can be simply removed from the unit by loosening the fasteners.

COIL

Coils are 3/8 inch OD copper tubes mechanically bonded to Wavy 3B aluminum fin collars. A manual air vent with drain line to the drain pan is standard to avoid any water drips when venting. Standard coils are factory leak tested at 20 kg/cm² (20 Bar) and are recommended for operation up to 13kg/cm² (13 Bar) working pressure.

Coils are fitted with male sweat connections or with optional threaded connections. Cooling only coil have one set of connections. Coil with hot water heating option have two sets of connections.


Available coils are 3 row cooling, 4 row cooling, 6 row cooling, 3 row cooling + 1 row heating, and 4 row cooling + 2 row heating.

DRAIN PAN

The drain pan of 25 mm depth, manufactured in 0.8 mm thick galvanized steel with epoxy resin coating, is a one-piece stamping without seams or joints, for maximum security from leaks. The insulation of the drain pan is 5 mm thickness, 27 kg/m³ density PE foam. The drain pan, which is levelable independently of fan coil unit, has one 3/4-inch male pipe thread (JIS Standard: B 0203-1966) connection.

OPTIONAL PLENUM/FILTERS

The rear return air plenum and bottom return air plenum, with 9 mm insulation, are optionally available for blow through units. A 25 mm thick foam or aluminum filter can also be selected optionally for the units with return plenum.

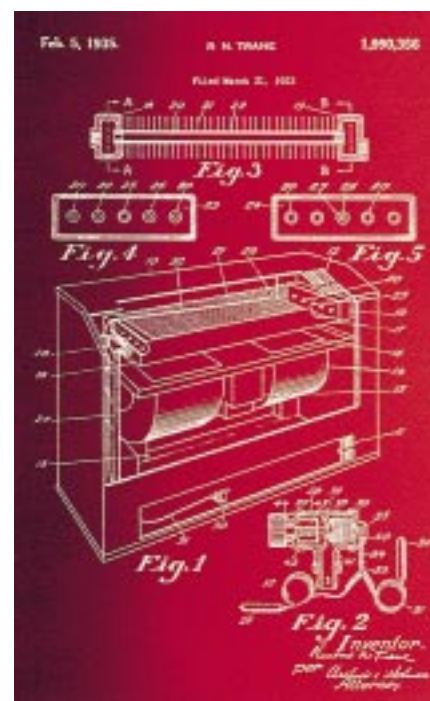

Since 1885, Trane has been at the technological forefront of air conditioning. The company's pioneering spirit, commitment to research and pursuit of quality have made it a world leader in the manufacture of water chillers.

Over 60 years ago Trane produced the first fan coil unit and in so doing created a product which is now built worldwide. The universal acceptance of this product has prompted Trane to focus the same engineering experience to the fan coil as given to the refrigeration products.



TRANE®

North American Group
The Trane Company
3600 Pammel Creek Road
La Crosse, WI 54601-7599

<http://www.trane.com>

An American-Standard Company



FM : 38631
ISO 9002 Qualified factory - Trane Taiwan

Literature Order Number	HCCA-TS-6
File Number	HCCA-PRC001-EN-1101
Supersedes	HCCA-TS-5
Stocking location	Taipei Taiwan

Since The Trane Company has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.